



For wire collated  
BDC nails

CE


# BeA Pneumatic Nailer 572 DCC

For nails of  $\varnothing 2,1 - 2,4$  mm in the lengths of 30 - 55 mm

- Extremely powerful and sturdy
- 360° adjustable exhaust
- Integrated sound absorption
- Ergonomic handgrip, insulated against cold
- Metal coil guide plate
- Translucent dust and dirt protection
- Contact actuation

## Applications

Production of pallets , crates and wooden boxes, interior fittings, drywalls

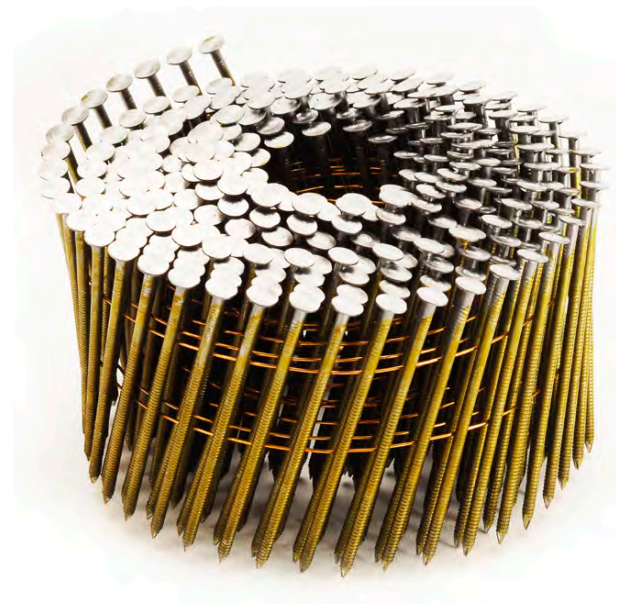

# 4WB ' ) \$ 655

## FWZ [cal Data




2,1 - 2,4 mm

30 - 55 mm

Article no.	12100673
EAN code	4045759061441
Magazine type	Oberlader
Weight	2,55 kg
Measurements, mm	L 293, H 270, W 130
Safety system	Kontaktauslösung
Fastener type	Typ BDC
Magazine capacity	1 Coil
Operating pressure	5 - 8 bar
Max. operating pressure	8 bar
Air consumption / operation	1,5-2,0 Liter / 6 bar
Inner hose diameter	Ø 9 mm LW empfohlen
Emission sound pressure level at workstation	$L_{pA, 1s, d} = 88$ dB
Single shot emission sound pressure level	$L_{WA, 1s, d} = 95$ dB
Vibration level as per ISO 8662-11 is	2,86 m/s <sup>2</sup> .
Accessories	Operating instructions, spare parts list, service instructions, allen wrench

## 5a[ ^ S[ e 465

465Z@ÖW/ wire welded coil nails	
Length	30 - 55 mm
Diameter	2,1 - 2,4 mm



465, %' ,, ' ' \_ \_

Material	BK = steel, bright
	NK = steel, electro galvanized
	RF = stainless steel, comparable with material 1.4301
	NR = stainless steel, comparable with material 1.4401
	FV = steel, hot dipped galvanized
Surface properties	Smooth
	Ring shank
	Screw shank
Kopfprägung	Flat head
	Dome head
	Pozi head
	Torx head

Further types available on request, nails conform to DIN as well as Eurocode

4WB ' ) \$ 655  
 ;` VgefdVWW  
 4WefYg` YeekefW W  
 4aYWefcSNW%, &  
 SS+S( 3ZdWeTgdY  
 9Vl S` k  
 I WfVW` Xad Sfa` W  
 WZS`fw E[Vg` fvd  
 FWL &+/" f&# " S ) \* Z&&  
 8Sj L &+/" f&# " S ) \* ZS) "  
 7 S[ ^ X2TWZ`dgbãã  
 i i i zVZ`dgbãã  
 4WB [ef gZ? [fY[W[` VW  
 X`YWW HWIO VW,

